



SCHEMATIC DIAGRAM

- 1 Silicon rectifier, 500 ma, 1000 PIV
- 2 Silicon rectifier, 500 ma, 1000 PIV
- Volume control—250,000 ohms
- Balance control—750,000 ohms
- Bass control—2 megohms
- Treble control—500,000 ohms
- Sum control—1,000 ohms
- 1 12AX7/ECC-83
- 2 12AX7/ECC-83
- 3 7199
- 4 7199
- 5 6BQ5/EL-84
- 6 6BQ5/EL-84
- 7 6BQ5/EL-84
- 8 6BQ5/EL-84

PART	5	6	7	8	9
3.3 M	0.4	0	.25		
3.3 M	.7	0	.70	.55	
3.3 M	0	360	0	365	
35					

ALL CONNECTIONS, THEREFORE, SHOULD BE MADE TO THE POINTS INDICATED, UNLESS OTHERWISE SPECIFIED.

12

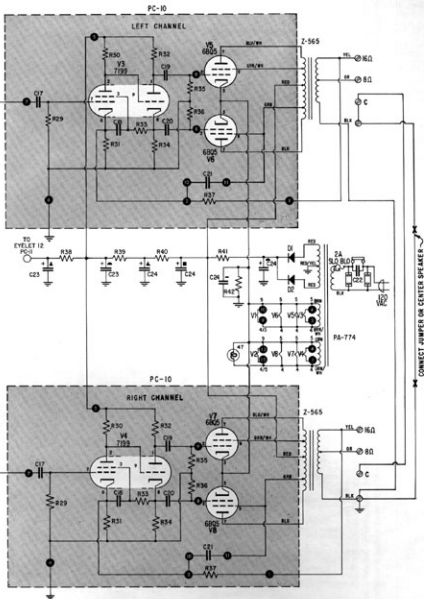

CONNECT JUMPER OR CENTER SPEAKER